


Data Sheet 300.09-1

Loading Chute T250

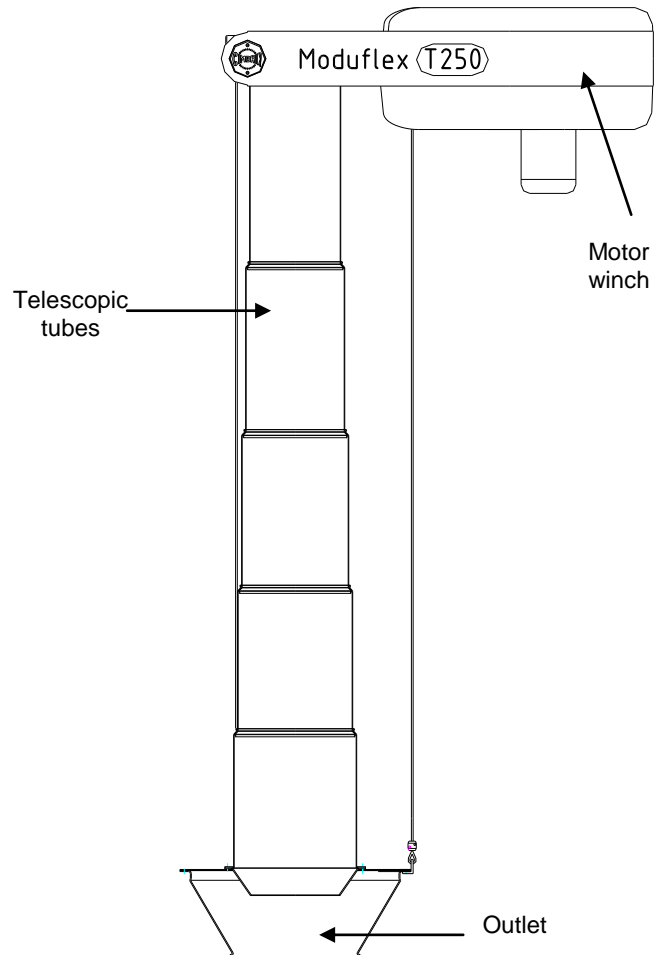

| Technical Information – T250 | |
|------------------------------|---|
| Inlet | Cylindrical Inlet tube in 2 mm steel. With Ø250 PN10 (2576B) connection c/w 12 off M20 nuts. Optionally with exhaust connection Ø100 with separate hose and snap lock system. |
| Telescopic tubes | One set of tubes consists of 5 tubes, manufactured in Aisi 316. The tubes are available in a long and short version. The complete set of tubes can be disconnected easily from the inlet and outlet. The individual tubes can be disconnected from the other tubes without the use of tools. |
| Outlet | Type T – Tank Outlet with steel cone for loading in tanker truck. Type F – Flat Outlet with dust skirt for loading in open truck. Type M – Multi Outlet with steel cone and dust skirt for loading in tanker truck and open truck |
| Motor Winch | Motor 0.55 kW, 1400 rpm. Gear box ratio 100:1. Tight and slack wire indication External 3-point wire hoist system with high precision ball bearings and 3 off winch discs vertically fitted. Hoist wires Ø5mm available in steel, stainless steel Aisi316 or Long Life steel quality. Self-lubricating wire rollers in Ertalite TX. |
| General info | Max. loading capacity approx. 150 m ³ /hour. Recommended connecting value for aspiration 550 m ³ /hour 50-150 mm WG. Metal contact parts available in stainless steel Aisi 304/316. Other metal parts available in painted steel st. 37. Other steel qualities on request. Surface treatment St. 37: Iron phosphating, 80 micron two-component coating RAL 9010 pure white. Surface treatment Aisi 304/316: Acid-washed without any further treatment Motor winch covers in ABS - RAL 6005 dark green Available with full approval and certificates for location in ATEX zone 21 and 22 (zone 20 inside the telescope) |

Accessories for Telescopic tube T250 please see separate Data Sheets.

Copyright © - The right to alterations is reserved


Data Sheet 300.09-2

Telescopic Tube T250 – Dimension Sheet



T250

| Set of tubes | Outlet type TS | | | Outlet type FS | | | Outlet type MS | | |
|--------------|----------------|------|------|----------------|------|------|----------------|------|------|
| | L1 | L2 | L3 | L1 | L2 | L3 | L1 | L2 | L3 |
| Short | 2642 | 864 | 1778 | 2657 | 879 | 1778 | 2942 | 1164 | 1778 |
| Long | 4142 | 1164 | 2978 | 4157 | 1179 | 2978 | 4442 | 1464 | 2978 |

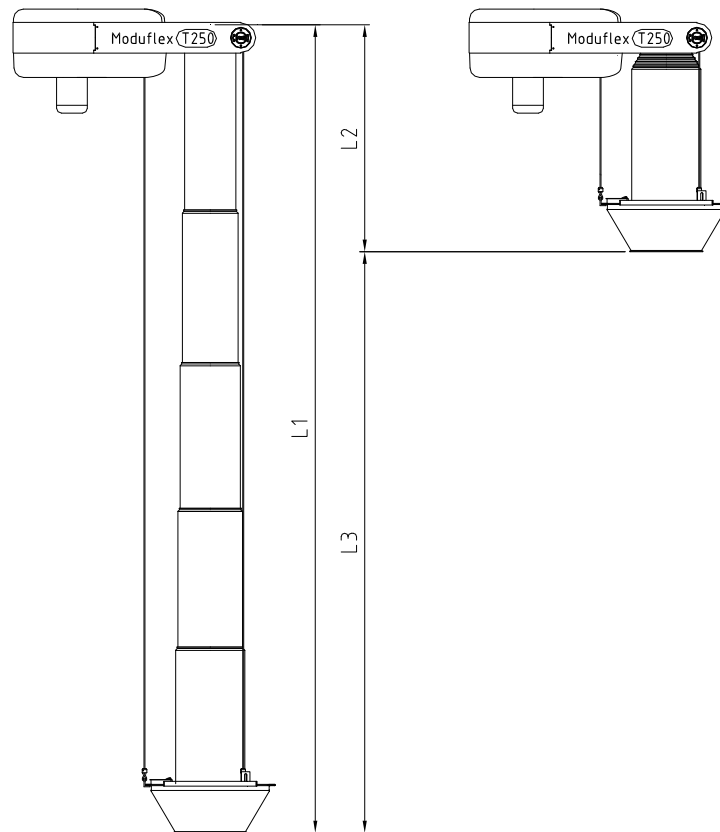

Copyright © - The right to alterations is reserved